

SPECIFICATIONS

MAXIMUM SIZE	44 ft. wide, 24 ft. high
CLASSIFICATION	FM Approved
LABEL	FM Fire Door Label to 12 ft. wide, 12 ft. high, 144 sq. ft. on masonry walls, or 12 ft. wide, 12 ft. high, 120 sq. ft. on non-masonry walls, or oversize door label on larger sizes
RATING	Fire rated up to 3 hours on interior or exterior walls of masonry construction, 1 1/2 hours on interior non-masonry walls
CURTAIN	Interlocking galvanized steel Type '33' flat slats with mineral wool insulation covered by 24 gauge backslats - 22 gauge to 24 ft. wide, 20 gauge over 24 ft. wide. Endlocks shall be riveted to ends of alternate slats
BOTTOM BAR GUIDES	Two 2" x 2" x 1/8" min. steel angles
BARREL BRACKETS	Formed 11 gauge min. steel U-channel guides on doors to 24 ft. wide (1/4" min. steel angles on wider doors) and steel wall angles bolted together and to wall with 3/8" min. fasteners no more than 24" apart
HOOD	6 5/8" min. steel pipe and solid steel shaft with sealed precision bearing and torsion spring(s) designed for 20,000 operating cycles
OPERATION	3/16" min. steel plates with sealed precision bearing on operator side and external tension adjustment wheel
RELEASE LOCKS	24 gauge min. galvanized steel with integral flame baffle
FINISH	"Easy-Reset" chain operator on doors to 20 ft. wide, 16 ft. high, 250 sq. ft., "Easy-Reset" motor operator on doors exceeding limits of chain operator <i>NOTE: "Easy-Reset" chain and motor operators have an internal release and governor with an average closing speed of 9" to 12" per second and eliminate the need for traditional mechanical reset</i>
WARRANTY	Fusible link activated single-side release, governor controlled descent with average closing speed between 6" and 24" per second Slide locks on coil side of bottom bar Baked-on primer and top coat on slats and hood - tan opposite coil side/off-white coil side, shop painted black primer on bottom bar, guides and brackets Two year limited warranty (excluding finish)

COMMON OPTIONS




S-label for air-leakage rated "smoke" doors



FM Approval on doors fire rated up to 4 hours



Keyed handle release (for chain operator)



"Easy-Reset PLUS" "Auto-Reset", "Auto-Reset PLUS" and failsafe time delay releases




Audible, visual and voice warning devices


OTHER OPTIONS

- Designs for up to 100,000 operating cycles
- Heavier gauge slats
- Listed brush seals (included with S-label)
- Sloping or irregular shaped bottom bars
- Galvanized or powder coat finishes
- Stainless steel doors

CURTAIN & BOTTOM BAR DETAILS




Type '33' Insulated Slat




Steel Angle Bottom Bar


GUIDE DETAILS




Type 'Z' Guide



Type 'E' Guide




Between Jamb Guide*



Tube Mount Guide*

CLEARANCES (typical face mount door shown)

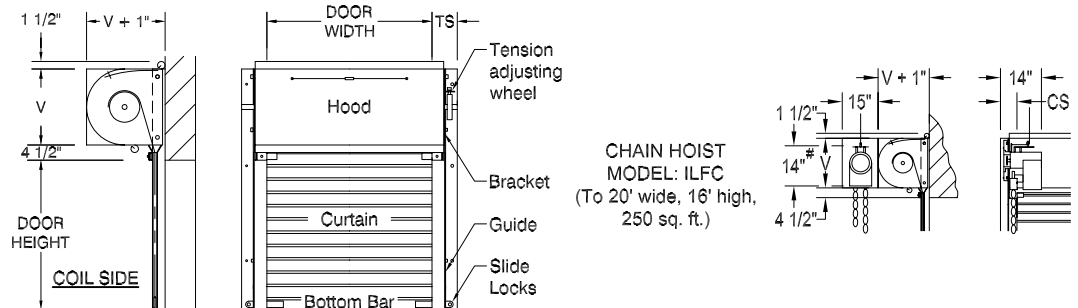

Clearances shown are for doors to 20 ft. wide, 16 ft. high. Consult factory for clearances on larger doors

CS	MS	TS
8"	8"	8"

- 'V' for doors to 8 ft. high is 15 1/2"
- 'V' for doors over 8 ft. to 11 ft. high is 17 1/2"
- 'V' for doors over 11 ft. to 15 ft. high is 20"
- 'V' for doors over 15 ft. high is 22"
- ("V" dimension includes required expansion clearance)

GENERAL NOTES:

Clearances are based upon standard door construction. Reduced clearances may be available. Some options may require additional clearance. Shop drawings for specific applications are available. Consult factory for any information not shown.

* Available as an option # Add 2" for "Easy-Reset PLUS" or "Auto-Reset"