


Each product is designated by a model code comprised of four letters. Each letter represents 1) application based series, 2) product type, 3) mounting, and 4) operation. The four-letter model code may be followed by a two letter suffix, representing curtain material and finish.

EXAMPLE:

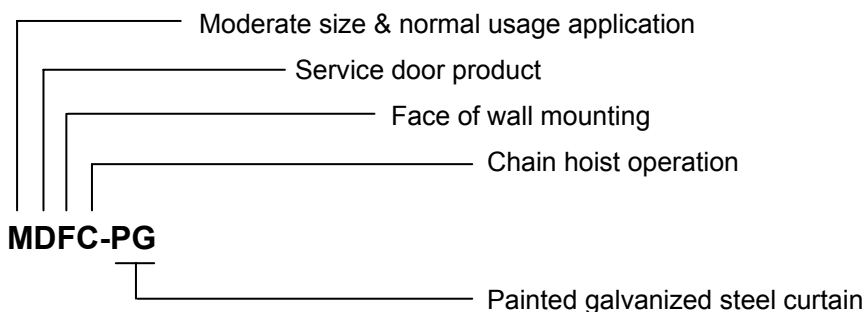

SERIES (<i>Application-based</i>)	DESIGNATION
Smaller sizes & lower usage	S
Moderate sizes & normal usage	M
Larger sizes, increased durability & higher usage	H
Service counters & other small openings	C
High performance / high speed (<i>300,000 cycles at up to 24 in./sec.</i>)	P
PRODUCT TYPE	DESIGNATION
Service door	D
Weather-Edge door (<i>perimeter weather seals</i>)	W
Insulated door (<i>insulated slats and perimeter weather seals</i>)	I
Ventilated door (<i>perforated or fenestrated slats</i>)	V
Labeled fire door (<i>also available as a Labeled Smoke Door</i>)	L
Grille	G
MOUNTING	DESIGNATION
Face of wall	F
Between the jambs	J
Tube supports	T
<i>(Wall angles are not used - guides and brackets are attached directly to tubes)</i>	
OPERATION	DESIGNATION
Push-up	P
Chain hoist	C
Awning crank	A
Motor operator	M
CURTAIN MATERIAL & FINISH	DESIGNATION
Painted galvanized steel	-PG
Bare galvanized steel	-BG
Powder coated galvanized steel	-PS
Mill finish aluminum	-MA
Clear anodized aluminum	-CA
Bronze anodized aluminum	-BA
Powder coated aluminum	-PA
Brushed finish stainless steel	-SS

NOTE: All combinations are not available for all products – refer to standard specifications and available options